


STRIKING INTERNATIONAL







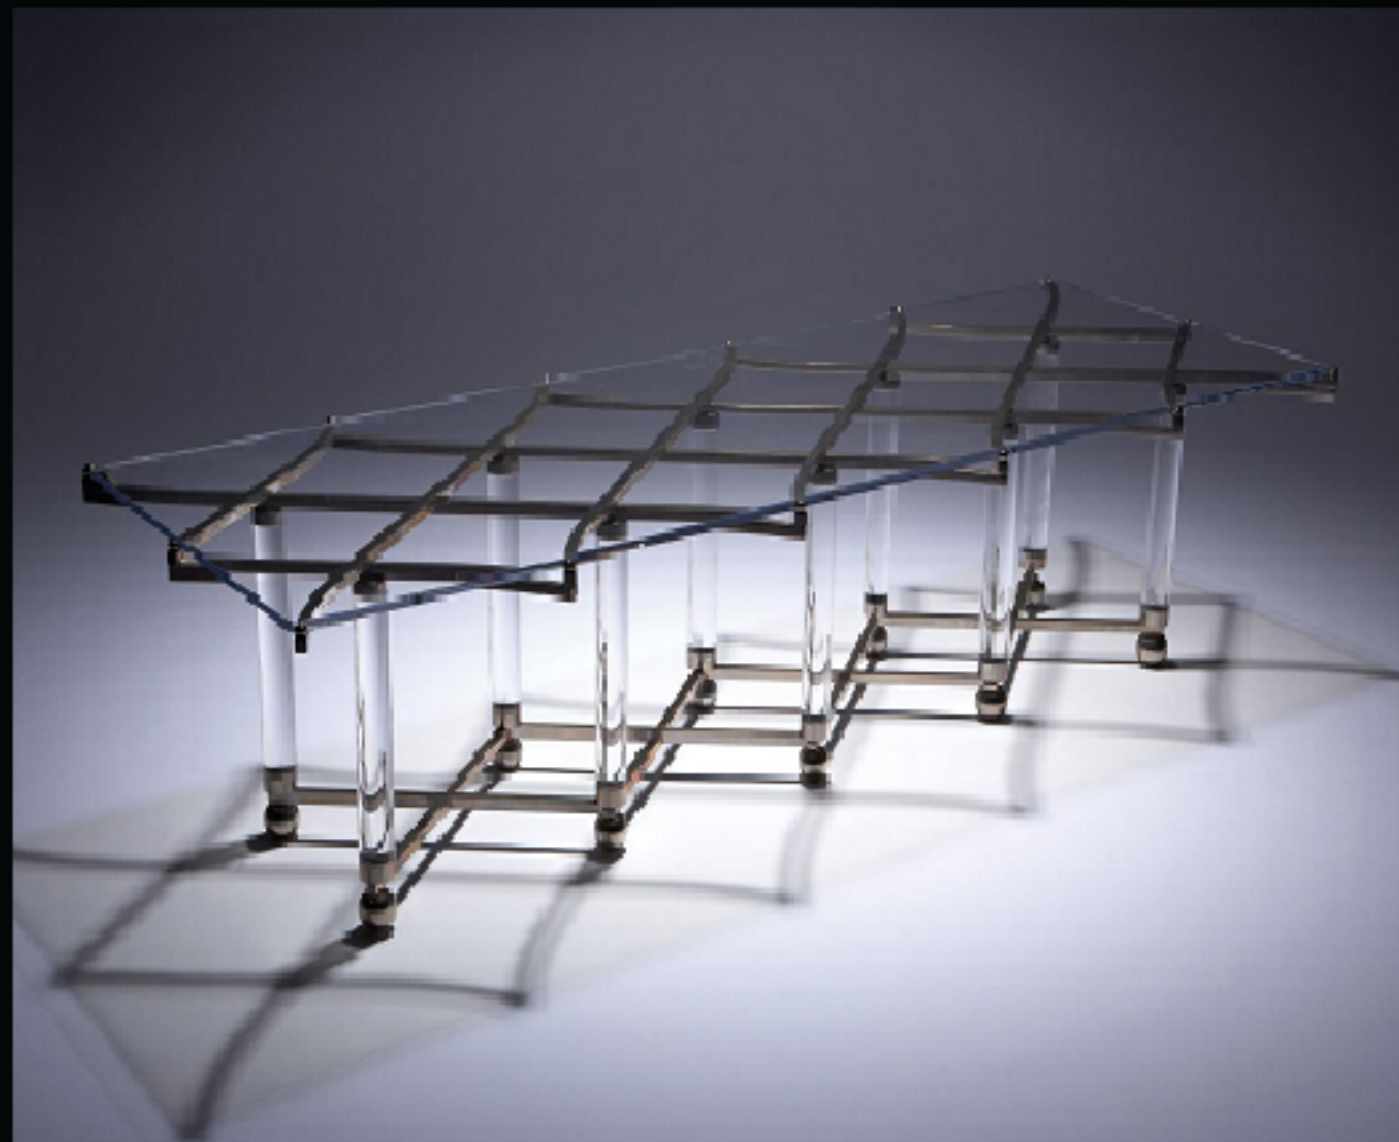



FASTENERS ENGINEERING

Hightensile











Stainless Steel










A CHART TO CHOOSE THE RIGHT FASTENER

| PRODUCTS | ILLUSTRATIONS | Size Metric (mm) | | Size Inches | | Equivalent Standards | | | A.S.T.M/ A.S.M.E. | ISO | |
|---|---|------------------|---------------------|----------------------|-------------------|----------------------------|-----------------------|------------------------|---------------------------------------|--------------------------------------|----------------------|
| | | Dia | Length | Dia | Length | I.S. | DIN | B.S. | | | |
| Hex Bolt & Nut |  | M6 to M64 | 12MM to 500MM | 1/2" to 2" | 1/2" to 20" | 1363 | 601 | 916, 4190, | A193 A325 A320 A490 F-568 | 4016 | 7411, 7412, |
| | | | | | | 3138 | 609 | 3692, 15048, | | 4018 | 4775 |
| | | | | | | 3757 | 610 | 14399 | | 4034 | |
| | | | | | | 1364 | 931 | 1083, 1768, | | 4014 | 7413 |
| | | | | | | 6623 | 933 | 4395 | | 4017 | 7414 |
| | | | | | | Grade 4.6 to 12.9, A2 & A4 | | | | 4032 | 7417 |
| Hexagon Socket Head Cap Screws/ Set Screws |  | M3 to M48 | 15MM to 400MM | 1/8" to 2" | 1/2" to 16" | 2269 | 912, 6912 | 2470 | A193 A-574 F-835 F-912 | 4762 | 7379 |
| | | | | | | 6761 | 7984, 7991 | | | 10642 | 7380 |
| | | | | | | | 913, 914, 915, 916 | | | 4026 | |
| | | | | | | | | | | 4027 | |
| | | | | | | | | | | 4028 | |
| | | | | | | | | | | 4029 | |
| Hex Nuts |  | M6 to M64 | | 1/4" to 2 1/2" | | 1363 | 934 | 916, 4190, | A194, A563 | 4032 | 4775 |
| | | | | | | 3138 | 6334 | 1083, 1768, | | | 7413 |
| | | | | | | 1364 | 555 | 3692 | | 4034 | 7414 |
| | | | | | | Grade 4 to 12, A2 & A4 | | | | 7417 | |
| | | | | | | | | | Grade 2H, 4, 7, DH | | |
| Hex Lock Nuts |  | M3 to M64 | | 1/8" to 2 1/2" | | 1363 | 439 | 4185 Part 1 3692 | A-563 | 4035 | 4036 |
| Hex Slotted & Castle Nuts |  | M6 to M48 | | 1/4" to 2 1/2" | | 2232 | 935 937 | 1083 1768 3692 | A-563 | | |
| Hex Nyloc Nuts |  | M3 to M48 | | 1/8" to 2" | | 7002 | 980 982 985 | | B18.16.3 | 7040 7041 | 10511 10512 |
| Punched Washers |  | M3 to M64 | | 1/8" to 2 1/2" | | 2016 | 125 | 3410 4320 | F-436 B18.22 | 7089 7090 7091 7092 7093 | 7094 7415 7416 |
| Spring Washers |  | M2 to M36 | | 1/8" to 1" | | 3063 6735 | 127 | 1802 4464 | B18.21.2 | | |

A CHART TO CHOOSE THE RIGHT FASTENER

| PRODUCTS | ILLUSTRATIONS | Size Metric (mm) | | Size Inches | | Equivalent Standards | | | A.S.T.M./ A.S.M.E. | ISO | |
|----------------------------|---|------------------------------------|---------------------|-----------------------|-------------------|--|---|--------------------------|-----------------------------|----------------------|--|
| | | Dia | Length | Dia | Length | I.S. | DIN | B.S. | | | |
| Disc Spring Washers |  | M3 to M30 | | | | 2507 | 2093 | | | | |
| Lock Washers |  | M3 to M24 | | | | 5371 | 6797 | | B18.21.2 | | |
| Serreted Washers |  | M3 to M12 | | | | 5556 | 6797 | | B18.21.2 | | |
| Circlips/ Eclips |  | 5mm to 200mm 15mm to 24mm | | | | 3075 Type A & B/C | 471 472 6799 | 3673 Part 1 Part 2 | | | |
| Self Tapping Screws |  | No. 0 to No. 12 | 3.2MM to 50MM | No. 0 to No. 12 | 1/8" to 2" | 5957, 7169 7170, 7173, 7178 | 7970, 7971, 7972, 7973, 7981, 7982, 7983 | 4174 7433 | | 1479 7050 7051 | |
| Machine Screws |  | M2 to M12 | 5MM to 75MM | 1/8" to 1/2" | 1/4" to 3" | 1365, 1366, 4218, 7483, 7485, 7486 | 84, 85, 86, 267, 965, 966 | 57, 84, 93, 450 | | 1207 2009 2010 | |
| Split Cotter Pins |  | M10 to M16 | 5MM to 250MM | 1/16" to 5/8" | 1/4" to 10" | 549 | 94 | 1576 | B18.8.6 | 1234 | |
| Stud & Threaded Rods |  | M6 to M64 | 25MM to 200MM | 1/4" to 2 1/2" | 1" to 80" | 1862 | 938 939 | | A320L7/L7M A193Gr B7/B7M | | |

A CHART TO CHOOSE THE RIGHT FASTENER

| PRODUCTS | ILLUSTRATIONS | Size Metric (mm) | | Size Inches | | Equivalent Standards | | | A.S.T.M/ A.S.M.E. | ISO | |
|-----------------------------------|---|------------------------|-------------------------------|-------------|--------------|------------------------------------|---------------------------------|------|----------------------|-----|--|
| | | Dia | Length | Dia | Length | I.S. | DIN | B.S. | | | |
| Anchor Fasteners |  | M6 to M64 | 40MM to 250MM | | | | | | | | |
| Fully Threaded Rods/Studs |  | M3 to M48 | 15MM to 3000MM | 1/8" to 2" | 1/2" to 120" | | 975 976 | 916 | | | |
| Cup Square Bolt & Nut |  | M6 to M42 | 12MM to 500MM | | | | 603 604 605 607 608 | | | | |
| Hexagon Coach Screws |  | M10 to M16 | 12MM to 150MM | | | | 571 | | | | |
| Eye Nuts |  | M6 to M42 | | | | | 582 | | | | |
| Eye Bolts |  | M16 to M48 | | | | | 444 580 | | | | |
| Channel Nuts |  | M6 M8 M10 | Plain, Short and Long Springs | | | | | | | | |
| Shear Nut |  | M8 to M16 | | | | As per customer requirement | | | | | |
| Shear Load Connector/ Weld Nut |  | M13 (1/2) to M22 (7/8) | 50MM to 208MM | | | | | | ASTM-A108 | | |



SI - 01
OPEN DIE SCREW




SI - 02
SOCKET SCREWS CLASS 12.9



SI - 03
SPECIAL WAHSERS




SI - 04
SPECIAL NUTS

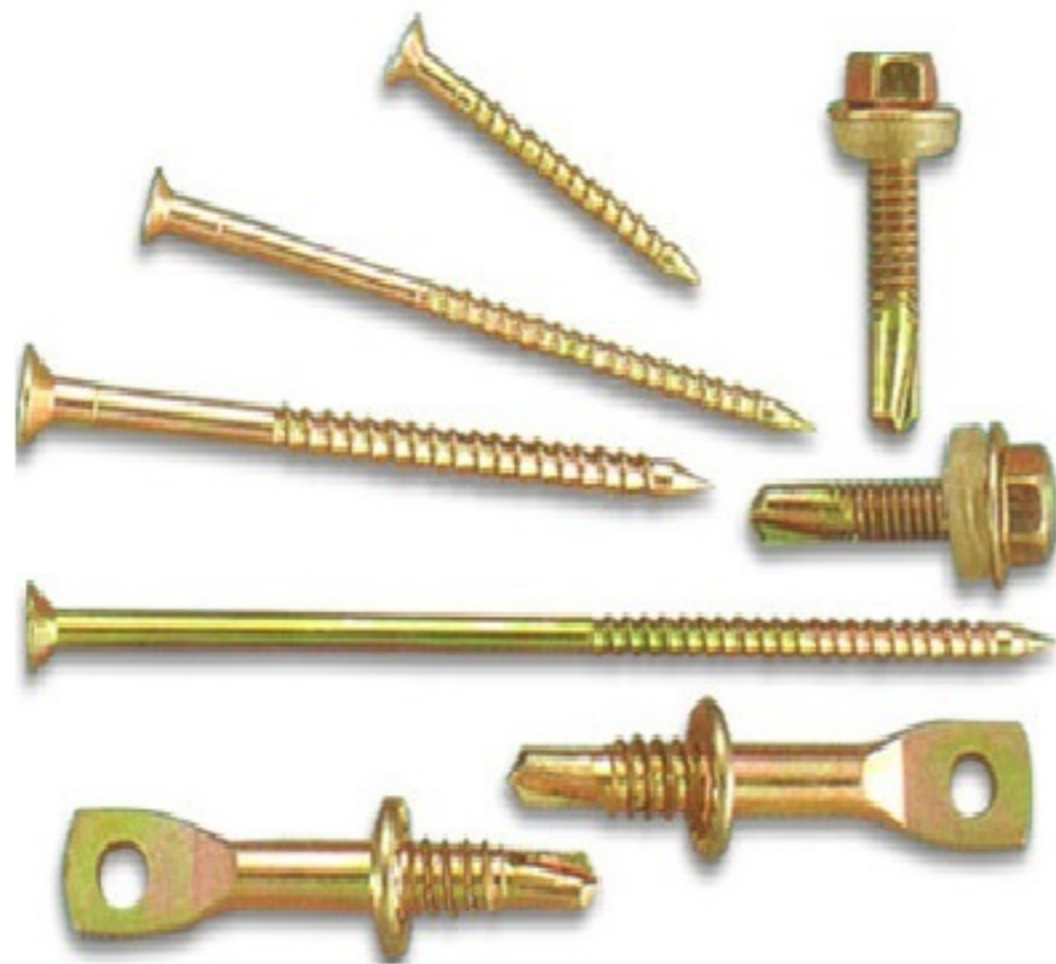

SI - 05
KING OF SCREWS



SI - 06
DROP IN ANCHORS

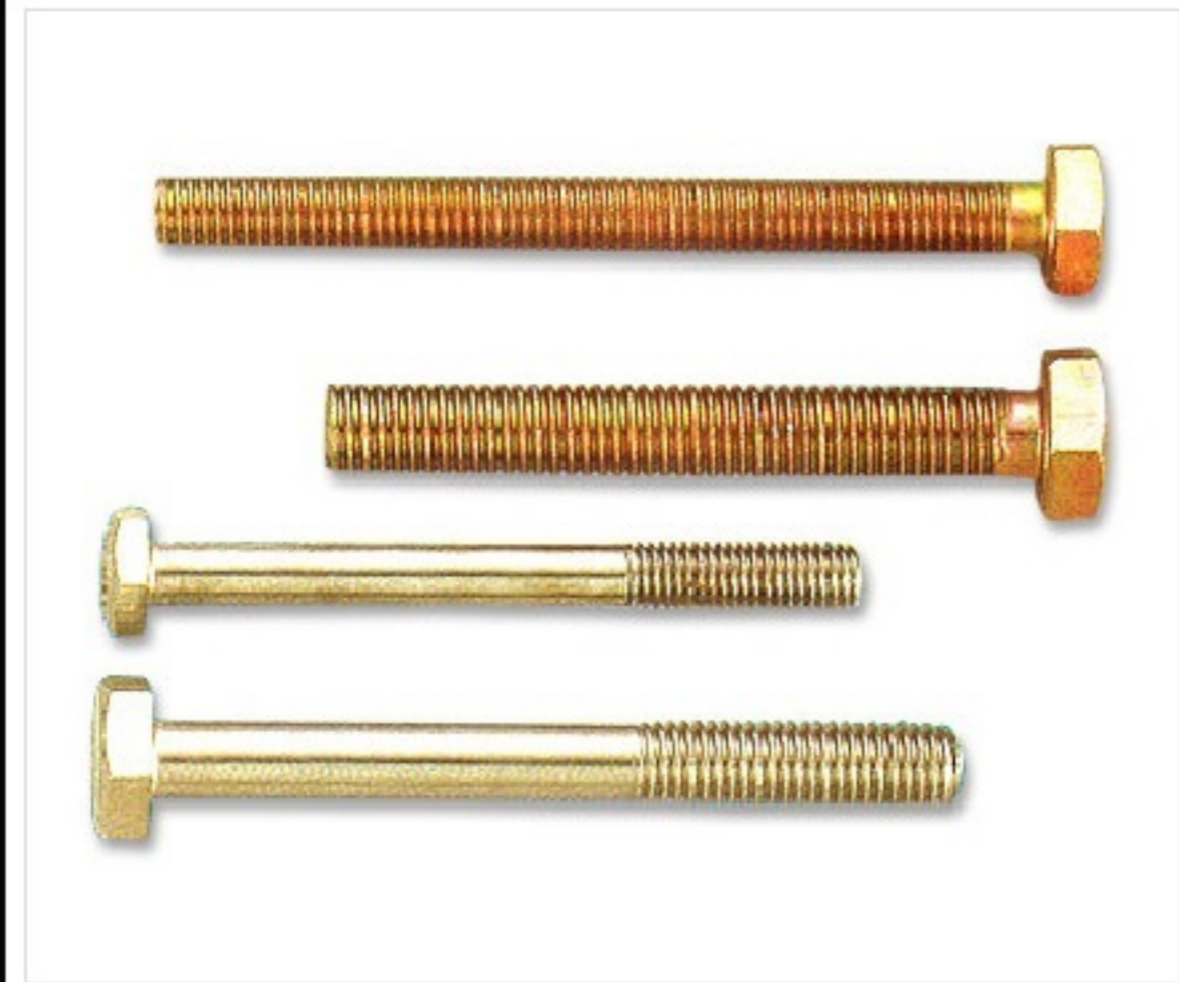

SI - 07 (HEX BOLTS)

Dia 6mm upto 24mm
Length 10mm upto 160mm
Plating any Color



SI - 08 (NUTS)

Dia 6mm upto 14mm




SI - 09
EYE COUPLING NUTS



SI - 10 (LONG NUTS & HANG)

Dia 6mm upto 30mm

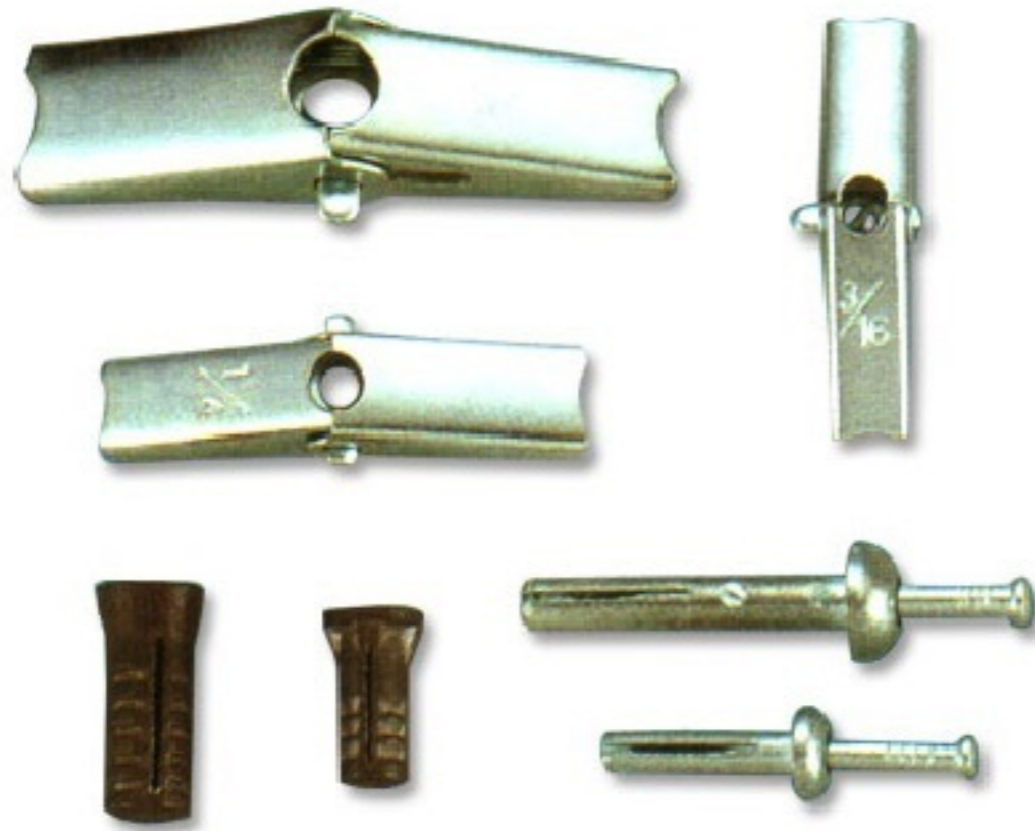

SI - 11
Hammer Drive, Lead Wood, Toggle Wing



SI - 12
Eye Hook Screw



SI - 13
Kind of Sleeve Anchor



SI - 14
Automotive Fasteners and special parts




SI - 15
Nylon Anchor



SI - 16
Hub Bolts Motor Parts



SI - 17 (*Benjo Bolts*)

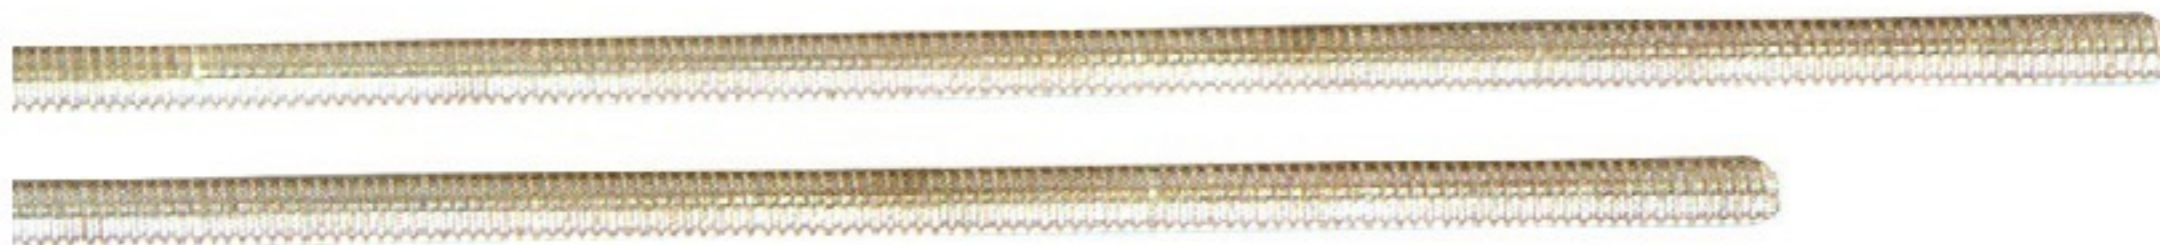


SI - 18 (*Thired Bar*)
Length 1000mm to 24mm, Dia 6mm to 30 mm

INHOUSE DESTRUCTIVE & NON DESTRUCTIVE TESTING LABORATORIES

QUALITY CONTROL

- Chemical product check analysis
- Heat treatment tests
- Jominy quenching tests
- Room temperature tension tests (or at 0° C)
- Low temperature impact tests (upto-196° C)
- Stress rupture tests
- Hardness tests
- Uts test
- Bend tests
- Proof load test
- Macrotech tests
- Microtech tests
- Grains size
- Decarburization tests
- Ultra soud testing
- M.P. tests

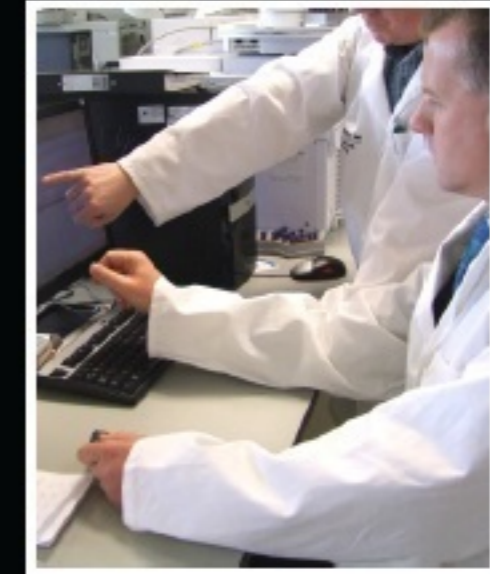

**UNDER THE DIRECTION OF ITS QUALITY MANAGEMENT TEAM
A FULLY REGISTERED QUALITY SYSTEM TO ISO 9001 : 2000**



DEVELOPMENT CELL

Fully equipped with modernize tool room facility is well placed to supply Global, Agricultural & Off-Highway Industries.

- Sheet Metal Components
- Pressing, Forgings & Fabrications
(As per customers drawings & specifications)

A fully computerized test certification program ensures accurate documentation for all orders supplied.

“A FULLY REGISTERED QUALITY SYSTEM TO ISO 9001 : 2000”



STRIKING INTERNATIONAL

H.O. : Shop No. 1, Guru Ram Dass Nagar, Khanna-141401 (Pb.) INDIA

B.O. : Shop No.1, Above OBC Bank, G.T. Road, Sahnewal (Pb.) INDIA

Tel : +91-161-2847321 • Fax : +91-161-2847321

Email : dhand.gurender@live.com, striking.intl@hotmail.com